



**Description**


Sub-plate mounting style return line filter.

Paper element filtration media.

Spin on disposable canisters.




**Section**

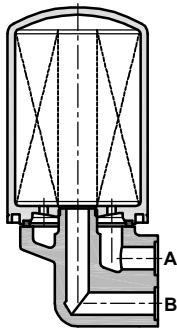

Sub-plate type, with top mounted element


Hydraulic Symbol





**Unit dimensions**

Dimensions in mm.

Sub-plate type, with top mounted element

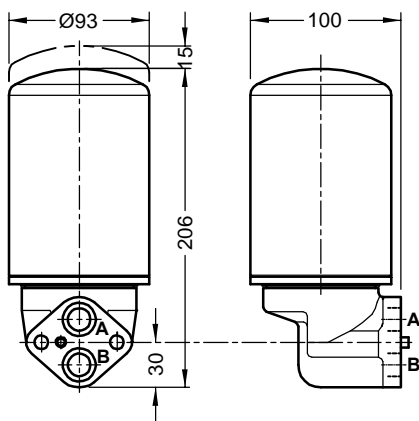

Mounting interface

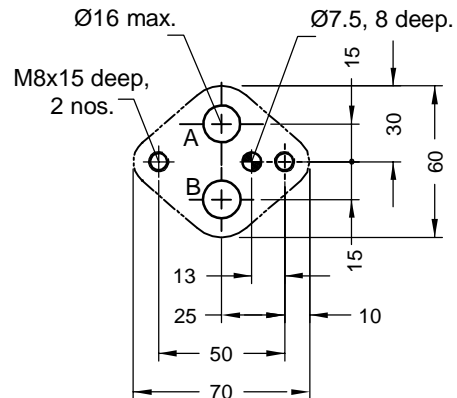




## Technical specification

Hydraulic medium	-	Petroleum and mineral based oils only.
Mounting interface		Factory standard.
Mounting position	-	Vertical filter element axis preferred.
Maximum working pressure	-	7 bar.
Working temperature	-	-20° to +70°C.
Flow handling capacity	-	40 l/min. (nominal).
Filtration capacity - RF S25	-	25 Microns nominal.
Mass (approx)	-	1 kg.

## Ordering code

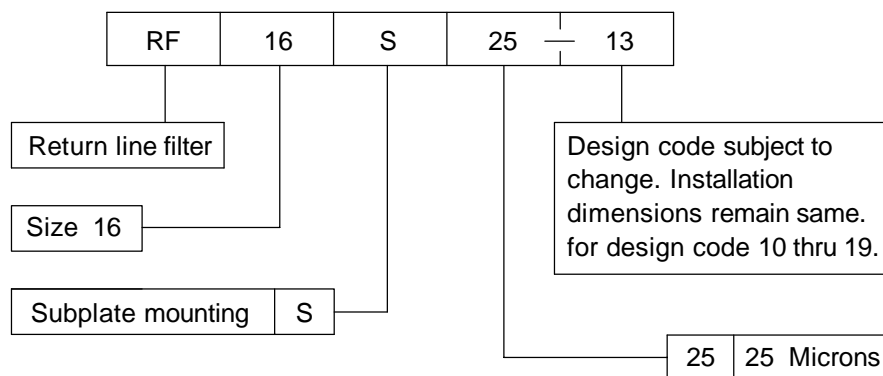

Due to continuous improvement in the design of the product, the actual product supplied may look different than shown above.  
For critical applications, please ask for certified installation drawing.